

80BME80

| BAGNOMARIA ELTRICO SU MOBILE APERTO

| ELECTRIC BAIN-MARIE ON OPEN-FRONTED UNIT

| Caratteristiche

| Features



| Piano di lavoro e vasca in acciaio inox AISI 304 con ampie raggiature | Carico acqua direttamente nella vasca mediante elettrovalvola comandata da pulsante | Capacità 2 X (GN 1/1 + 1/3) | Rubinetto di scarico con comando frontale | Resistenza piatta isolata con materiale siliconico, fissata direttamente sul fondo esterno della vasca | Regolazione termostatica della temperatura da 30° a 90°C con indicatore luminoso che ne indica il funzionamento | Termostato di sicurezza a ripristino automatico | Pannello comandi facilmente estraibile per facilitare le operazioni di pulizia e manutenzione | Scarico fumo in ghisa rimovibile | Piedini in acciaio inox regolabili in altezza

| Work top and tank in pressed AISI 304 stainless steel with fully rounded corners | Water is put directly into the tank by means of an electric valve operated by a press button | Capacity 2 X (GN 1/1 + 1/3) | Water drainage tap operated from the front element insulated with silicone material, fixed directly onto the external bottom of the tank | Thermostatic regulation of the temperature from 30° to 90°C with light indicator to show when functioning | Safety thermostat with automatic reset | Control panel which can be quickly removed for easy cleaning and maintenance | Removable vitrified cast iron exhaust grate | Adjustable 304 AISI stainless steel feet



MODELLO
MODEL



DIMENSIONI mm
DIMENSIONS mm



POTENZA ELETTRICA KW
ELECTRIC POWER KW



VOLUME m³



PESO Kg
WEIGHT Kg



ALIMENTAZIONE
FEEDING



ALLACC. ELETTRICO
ELEC. CONNECTION

8BME800

800x900x900


2,96

1,2

68

230 V

VAC230-1N 50/60Hz

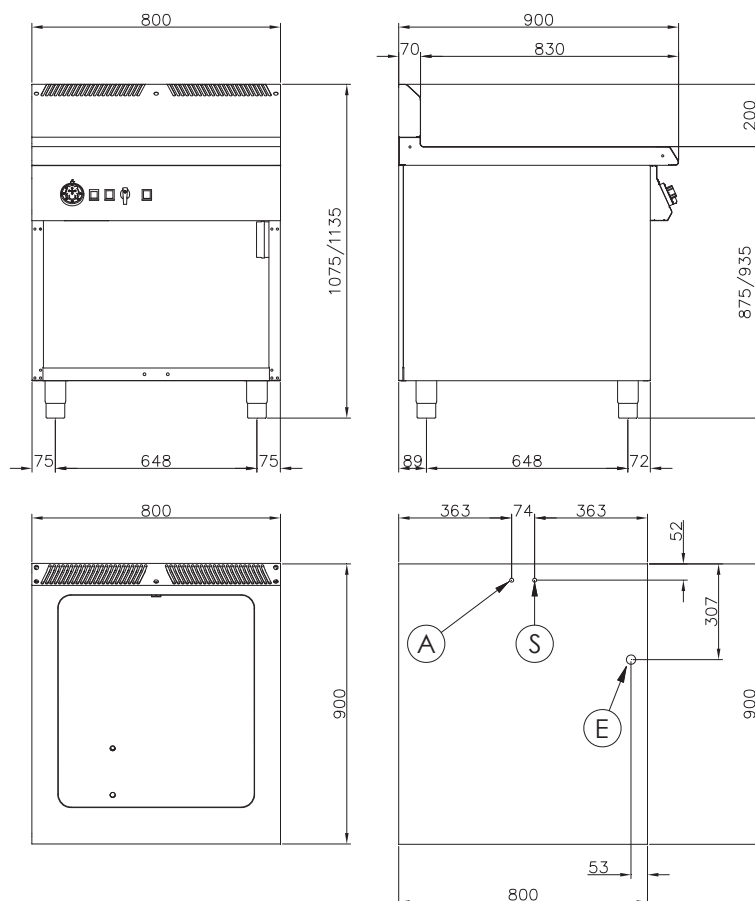

A = Carico acqua ø 1/2"
Water supply ø 1/2"

S = Scarico acqua
Water drain

E = Allacciamento elettrico
Electrical connection