

80PQG10D

| PENTOLA GAS DIRETTA 100 LT.

| DIRECT GAS BOILING PANS 100 LT.



| Caratteristiche | Features

| Struttura esterna e piano di lavoro in acciaio inox AISI 304 | Vasca coibentata e fondo in acciaio inox AISI 316
| Coperchio incernierato posteriormente e bilanciato a molla con maniglia atermica | Capacità vasca 100 lt.
| Gruppo riempimento vasca in ottone cromato | Rubinetto di scarico frontale in ottone cromato con maniglia atermica
| Riscaldamento a gas diretto con bruciatori in acciaio inox a fiamma stabilizzata | Rubinetto valvolato con fiamma pilota per l'accensione dei bruciatori | Accensione piezoelettrica del pilota | Scarico fumo in ghisa rimovibile | Piedini in acciaio inox regolabili in altezza

| External structure and worktop in AISI 304 stainless steel | Tank insulated with bottom in AISI 316 stainless steel | Lid hinged at the back and counter-balanced, with heat-resistant handle | Tank capacity 100 lt. | Tank filling unit in chromium-plated brass | Front drainage tap in chromium-plated brass with heat-resistant handle
| Direct gas heating with stainless steel burners with stabilized flame | Valve tap with pilot flame for burner ignition | Piezoelectric ignition of the pilot flame | Removable vitrified cast iron exhaust grate | Adjustable AISI 304 stainless steel feet



MODELLO
MODEL



DIMENSIONI mm
DIMENSIONS mm



POTENZA GAS KW
GAS POWER KW



VOLUME m³



PESO Kg
WEIGHT Kg



ALLACCIAMENTO GAS
GAS CONNECTION

80PQG10D


800x900x900

21

1,4

135

Ø 1/2"

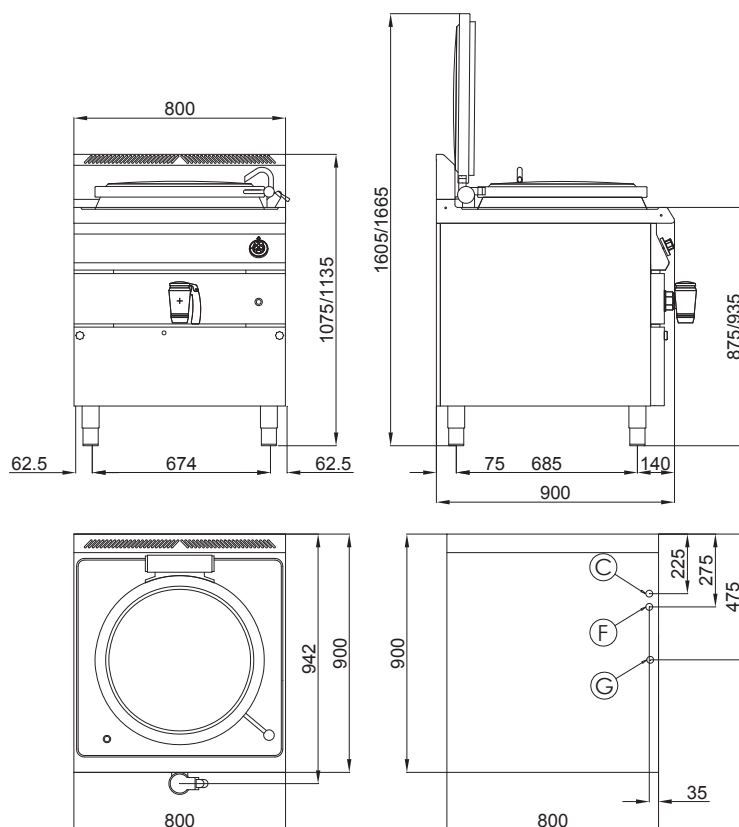

G = Gas Ø 1/2"
C = Carico acqua calda 10 mm
Hot water supply 10 mm
F = Carico acqua fredda 10 mm
Cold water supply 10 mm