

80FRG44R

| FRIGGITRICE ELETTRONICA A GAS CON 2 VASCHE DA 21+21 LT.

| GAS ELECTRONIC FRYER WITH 2 TANKS 21+21 LT.

| Caratteristiche

| Features



| Piano e vasca stampati con ampie raggiate, in acciaio inox AISI 304 | Ampia zona fredda sul fondo per il deposito delle impurità | Scarico dell'olio mediante rubinetto a sfera nella bacinella inox alloggiata nel mobile | 2 vasche indipendenti da 21+21 lt. | Bruciatori in ghisa nichelati ad alto rendimento termico | Tubi scambiatori passaggio fiamma situati all'interno della vasca | Regolazione della temperatura da 30° a 195°C mediante scheda termostatica | Display digitale per la lettura della temperatura (precisione (+/- 1°C)) | Accensione elettronica del pilota | Pulsante "RAPID" per scioglimento graduale di grassi solidi mediante riscaldamento iniziale intermittente programmabile | Pannello comandi facilmente estraibile per facilitare le operazioni di pulizia | Scarico fumo in ghisa rimovibile | Piedini in acciaio inox regolabili in altezza

| Top and tank pressed with fully rounded corners, in aisi 304 stainless steel | Large cold zone on the bottom for depositing of impurities | Oil drainage by means of ball cock into the stainless steel tray housed in the base unit | 2 independent tanks 21+21 lt. | Burners in nickel-plated cast iron with high thermal efficiency | Flame passage exchanger tubes situated on the inside of the tank | Regulation of the temperature from 30° to 195°C by means of safety electro valve and thermocouple controlled by thermostatic card | Digital display for the reading of the temperature (precision +/- 1°C) | Electronic pilot ignition | "RAPID" button for gradual melting of solid fats by means of intermittent initial heating | Control panel which can be quickly removed for easy cleaning and maintenance | Removable vitrified cast iron exhaust grate | Adjustable AISI 304 stainless steel feet



MODELLO
MODEL



DIMENSIONI mm
DIMENSIONS mm



POTENZA GAS KW
GAS POWER KW




ALIMENTAZIONE
FEEDING



ALLACC. GAS
GAS CONNECTION

80FRG44R	800x900x900	42	230 V	Ø 3/4"
VOLUME m ³	PESO Kg WEIGHT Kg	POTENZA ELETTRICA KW ELECTRIC POWER KW	-	ALLACC. ELETTRICO ELEC. CONNECTION
1,2	120	0,01	-	VAC230-1N 50/60Hz

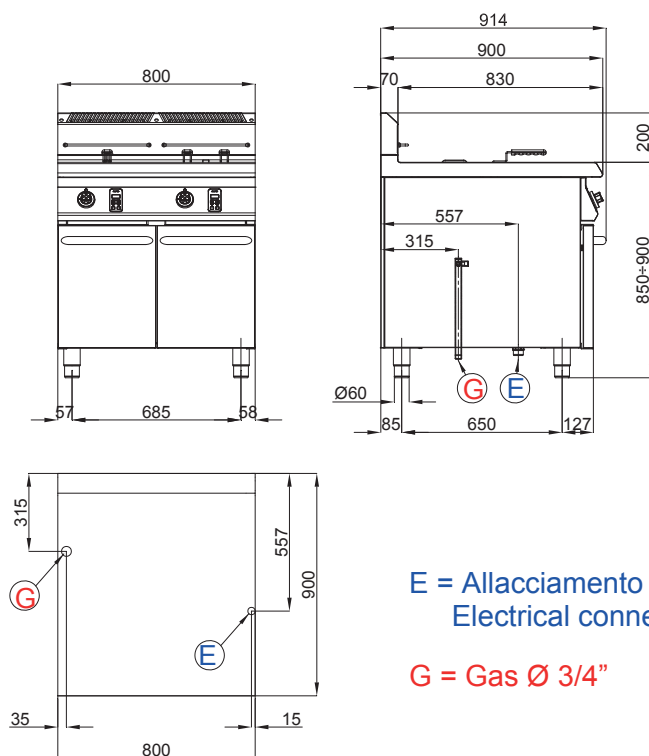

E = Allacciamento elettrico
Electrical connection

G = Gas Ø 3/4"