

U70FTE40L

FRY-TOP ELETTRICO SU MOBILE APERTO

ELECTRIC FRY-TOP ON OPEN-FRONTED UNIT



Caratteristiche

Features

Piastra di cottura realizzata in speciale acciaio levigato di grosso spessore | Cassetto raccogli grassi estraibile | Resistenze corazzate INCOLOY a diretto contatto della superficie inferiore della piastra | Regolazione termostatica della temperatura da 100° a 300°C | Termostato di sicurezza a riarmo manuale | Lampade spia per il controllo del funzionamento | Pannello comandi facilmente estraibile per facilitare le operazioni di pulizia e manutenzione | Piedini in acciaio inox regolabili in altezza

Cooking plate in special thick honed steel | Removable fat collecting drawer | INCOLOY armoured heating elements in direct contact with the lower surface of the plate | Thermostatic temperature regulation from 100° to 300°C | Safety thermostat with manual reset | Warning lights for functioning control | Control panel which can be quickly removed for easy cleaning and maintenance | Adjustable AISI 304 stainless steel feet



MODELLO
MODEL



DIMENSIONI mm
DIMENSIONS mm



POTENZA ELETTRICA KW
ELECTRIC POWER KW



VOLUME m³



PESO Kg
WEIGHT Kg




ALIMENTAZIONE
FEEDING



ALLACC. ELETTRICO
GAS CONNECTION

U70FTE40L	400x730x900	4,8	0,5	66	400 V	VAC400-3N 50/60Hz
-----------	-------------	-----	-----	----	-------	-------------------

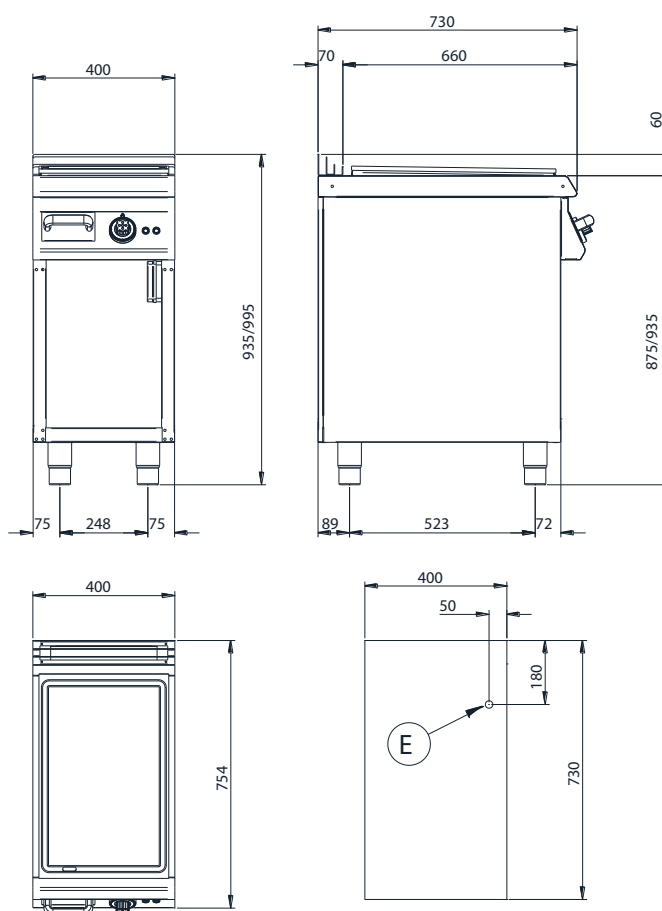

E = Allacciamento elettrico
Electrical connection