

U70FTE80LR

| FRY-TOP ELETTRICO SU MOBILE APERTO

| ELECTRIC FRY-TOP ON OPEN-FRONTED UNIT

| Caratteristiche | Features



| Piastra di cottura realizzata in speciale acciaio levigato di grosso spessore | Cassetto raccogli grassi estraibile | Comandi sdoppiati per il riscaldamento differenziato della piastra | Resistenze corazzate INCOLOY a diretto contatto della superficie inferiore della piastra | Regolazione termostatica della temperatura da 100° a 300°C | Termostato di sicurezza a riarmo manuale | Lampade spia per il controllo del funzionamento | Pannello comandi facilmente estraibile per facilitare le operazioni di pulizia e manutenzione | Piedini in acciaio inox regolabili in altezza

| Cooking plate in special thick honed steel | Removable fat collecting drawer | Dual control for the differentiated heating of the plate | INCOLOY armoured heating elements in direct contact with the lower surface of the plate | Thermostatic temperature regulation from 100° to 300°C | Safety thermostat with manual reset | Warning lights for functioning control | Control panel which can be quickly removed for easy cleaning and maintenance | Adjustable AISI 304 stainless steel feet



MODELLO
MODEL



DIMENSIONI mm
DIMENSIONS mm



POTENZA ELETTRICA KW
ELECTRIC POWER KW



VOLUME m³



PESO Kg
WEIGHT Kg







ALIMENTAZIONE
FEEDING



ALLACC. ELETTRICO
ELEC. CONNECTION

U70FTE80LR	800x730x900	9,6	0,9	110	400 V	VAC400-3N 50/60Hz
------------	-------------	-----	-----	-----	-------	-------------------

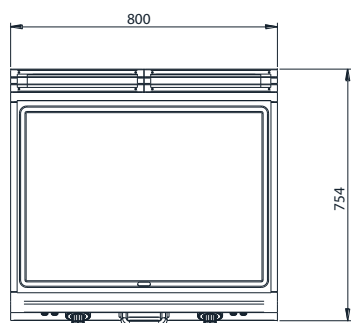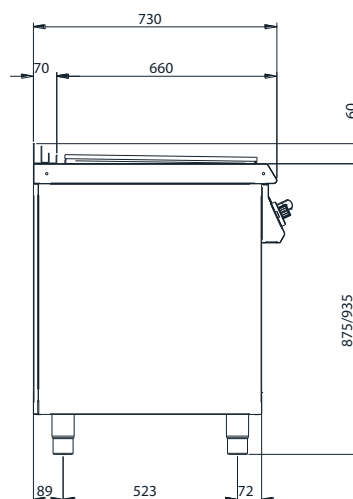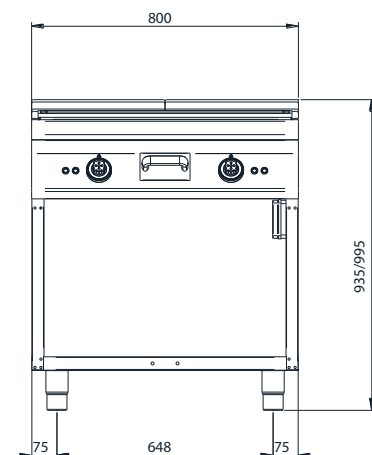

E = Allacciamento elettrico
Electrical connection