

80FRG21VP

| FRIGGITRICE A GAS CON 1 VASCA A "Y" DA 21 LT.

| GAS FRYER WITH 1 "Y" TANK 21 LT.

| Caratteristiche

| Features



| Piano e vasca stampati con ampie raggiature, in acciaio inox AISI 304 | Vasca a forma di "Y" trattata con vernice siliconica vulcanizzata che ne migliora il rendimento | Isolamento termico della camera di combustione | Ampia zona fredda sul fondo per il deposito delle impurità | Scarico dell'olio mediante rubinetto a sfera nella bacinella inox alloggiata nel mobile | 1 vasca da lt. 21 | Bruciatori in acciaio inox situati sotto la vasca | Regolazione termostatica della temperatura da 90° a 190°C con indicatore luminoso che ne indica il funzionamento | Elettrovalvola di sicurezza e termocoppia | Accensione elettronica del pilota | Termostato di sicurezza a riarmo manuale | Pannello comandi facilmente estraibile per facilitare le operazioni di pulizia e manutenzione | Scarico fumo in ghisa rimovibile | Piedini in acciaio inox regolabili in altezza

| Top and tank pressed with fully rounded corners, in AISI 304 stainless steel | Y-shaped tank treated with vulcanized silicone paint so as to improve thermal efficiency | Heat insulation of the combustion chamber | Large cold zone on the bottom for depositing of impurities | Oil drainage by means of ball cock into the stainless steel tray housed in the base unit | 1 tank 21 lt. | Burners in stainless steel located under the tank | Thermostatic regulation of the temperature from 90° to 190°C with indicator light showing when functioning | Safety electro valve and thermocouple | Electronic pilot ignition | Safety thermostat with manual reset | Control panel which can be quickly removed for easy cleaning and maintenance | Removable vitrified cast iron exhaust grate | Adjustable AISI 304 stainless steel feet



MODELLO
MODEL



DIMENSIONI mm
DIMENSIONS mm



POTENZA GAS KW
GAS POWER KW




ALIMENTAZIONE
FEEDING



ALLACC. GAS
GAS CONNECTION

80FRG21VP	400x900x900	19	230 V	Ø 1/2"
VOLUME m ³	PESO Kg WEIGHT Kg	POTENZA ELETTRICA KW ELECTRIC POWER KW	-	ALLACC. ELETTRICO ELEC. CONNECTION
0,6	76	0,01	-	VAC230-1N 50/60Hz

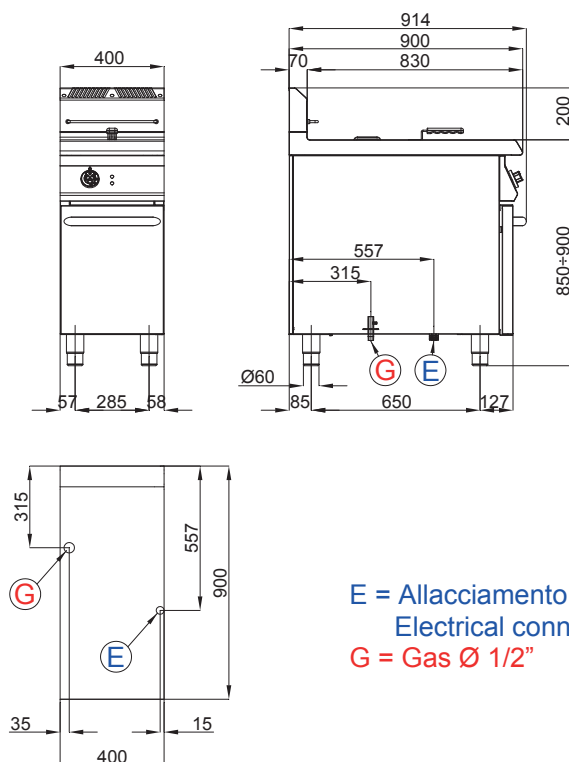

E = Allacciamento elettrico
Electrical connection
G = Gas Ø 1/2"